


BERTA

MEDIUM ROUND



Round bulkhead lamp with **no visible screws**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione **GX53 LED con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1B2.000

CCT SETTABLE

2700 K
 4000 K
 6500 K

SDCM <6



BERTA - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder. Complete with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalamпада GX53 o di piatto riflettente in resina bianca e portalamпада E27. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BERTA



Dimensions and weight

Diameter: Ø 275 mm
Depth: 80 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
17 W	2350 lm	6500 K	.E1K	
		4000 K		
		2700 K		

E27




Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL -LED)	max 160 mm ↔	*ADD. SUFFIX .P27
E27 + SENSOR (CFL -LED)		.PS7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.




7,2W
11,3W
17W = 60W
100W
150W
incandescent
SAVE 88%

BERTA

MEDIUM ROUND



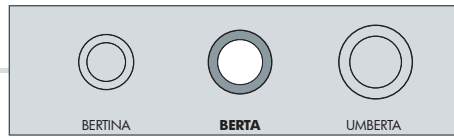

BERTA GX53	
7,2W	1B2.000.A1K
11,3W	1B2.000.B1K
17W	1B2.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
Pcs 16	
Kg 20	
mc 0,194	

BERTA E27	
E27 lampholder	1B2.000.P27
E27 with sensor	1B2.000.PS7
Pcs 16	
Kg 16,8	
mc 0,194	